
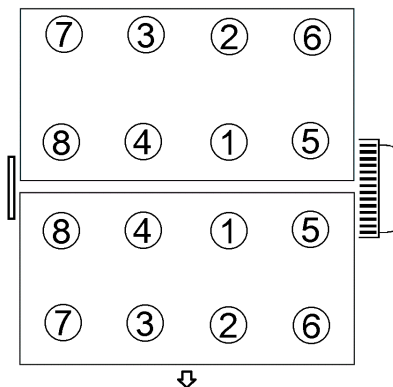


Anziehvorschrift Zylinderkopf**Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****586.280**passend für / suitable for
adaptable à / adaptable a**Chrysler / Dodge / Fiat /
Jeep****Das Original**Schraubenkopf / Head shape
Tête de vis / Cabeza de tornillo

Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete

949.390
M 12x1,5x128Anziehen/
Tightening/
Serrage/
Apriete

- ⊙ 30 Nm
- ⊙ 45 Nm
- 75°
- 50°
- loosen 360°
- 30 Nm
- 45 Nm
- 75°
- 50°

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 96 mm; ÷: 0,45 mm

mounting position: right

Mot.: ERB

3,6 Ltr. V6

200, 300C, Grand Voyager, Challenger, Charger
Durango, Journey, Freemont,
Grand Cherokee, Wrangler**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/11/12

586.280